

DATA SHEET



USB-C to HDMI Audio/Video Adapter Cable 4K30

Connect a USB Type-C device to the HDMI port of an HDTV or projector to display video and audio

OVERVIEW

The USB-C to HDMI Audio/Video Adapter Cable 4K30 allows for a direct connection of a USB-C device to an HDTV, projector, or other display with an HDMI port—making it an ideal solution for the office, work space applications or home use.

The cable form factor of this adapter provides a simple and convenient solution that eliminates the need for a separate adapter and cable.

This adapter utilizes the audio/video support built into USB Type-C ports to feed an audio/video signal to an HDMI HDTV or projector. This adapter supports up to a 4K (3840x2160 at 30Hz) resolution, allowing it to deliver a high quality video image to the connected display.

FEATURES

- Supports up to a 4K resolution at 30Hz
- Reversible, symmetrical USB-C connector
- Adapter in cable form factor
- Plug and Play—no driver required

ITEM DESCRIPTION

26890 15ft USB-C to HDMI Audio/Video Adapter Cable 4K30

DATA SHEET

SPECIFICATIONS:


USB-C to HDMI Audio/Video Adapter Cable 4K30

ELECTRICAL SPECIFICATIONS:

- USB Type-C [34AWG(7/0.06TC)+EAM]*4P+34AWG(7/0.06)*2C+28AWG(7/0.127TC)*2C+34AWG(7/0.06TC)*4C+AB(16/9/0.06TC 75%TC)OD:3.9MM~Black
- Rated Temperature: 80°C ; Voltage: 30V
- Max Conductor Resistance at 20°C: 34AWG , 860 OHMS/KM
- Insulation Resistance: 10M-KM MIN at 20°C DC 500V.(EIA—364—21)
- Dielectric Strength: AC 500V/1 Minute No Breakdown.(EIA—364—20)

PHYSICAL SPECIFICATIONS:

- Operating Temperature: 0 ~ 45°C Ambient
- Storage Temperature: -10 ~ 70°C Ambient
- USB Type-C Male: Contacts Terminal Gold Flash, Nickel Plated Shell; Black Insulation
- HDMI Male: Contacts Terminal Gold Flash, Nickel Plated Shell; Black Insulation. Chipset: PS171 QFN-56
- Molding Material: Black PVC Conforms RoHS
- Product is CE Marked and Conforms to 2011/65/EU RoHS2

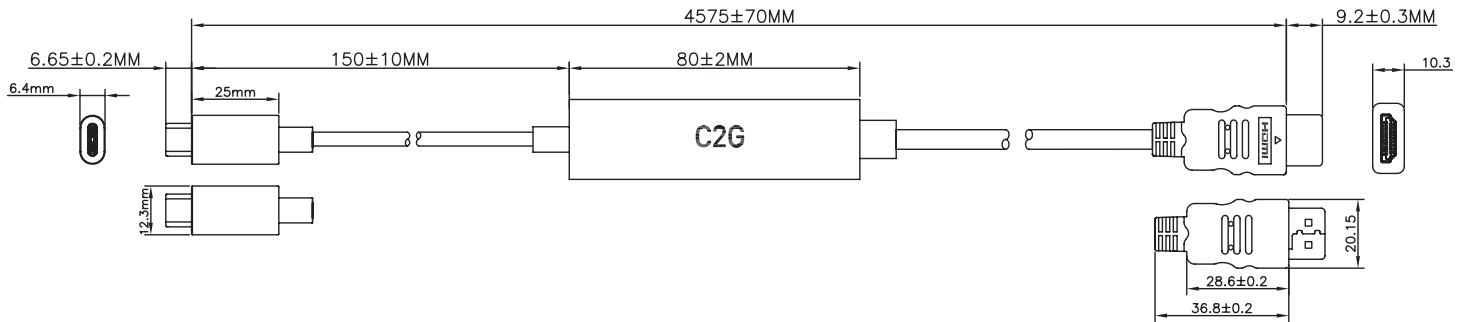


TYPE C

Pin Assignment

P1	Type C
CC	A5 Brown A5
DP	A6 Green A6
DN	A7 White A7
SBU1	A8 Blue A8
Vconn	B5 Yellow B5
SBU2	B8 Orange B8
SSTXp1	A2 Brown A2
SSTXn1	A3 White A3
	Drain
SSRXp2	A11 Red A11
SSRXn2	A10 White A10
	Drain
SSTXp2	B2 Green B2
SSTXn2	B3 White B3
	Drain
SSRXp1	B11 Blue B11
SSRXn1	B10 White B10
	Drain
GND (A1,A12,B1,B12)	A1 Shell
VBUS (A4,A9,B4,B9)	A4

HDMI

Pin Assignment

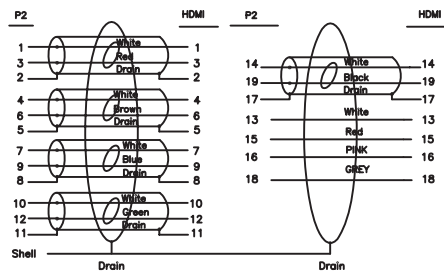

C2G
A brand of **legrand**

3555 Kettering Blvd.
Moraine, OH 45439
Phone: 800.CABL.911
www.c2g.com

Follow Us

