

DATA SHEET



Universal 4K HDMI[®] Adapter Ring with Color Coded Mini DisplayPort[™], DisplayPort, and USB-C[®]

Attach a Universal Cable Mount with color coded adapters to an HDMI cable to provide connectivity options for a meeting space display

OVERVIEW

The Patent Pending Universal 4K HDMI Adapter Ring is the perfect addition to conference rooms, huddle spaces, lecture halls or classrooms to make sure that anyone can connect. The standard configuration includes the adapters to connect nearly any device to the in-room display, while supporting up to a 4K video resolution. Standard configuration includes HDMI to DisplayPort, Mini DisplayPort, or USB-C adapters to meet connectivity challenges.

Color Coded Adapters: Each adapter is color coded with a band that saves time and frustration by making it easy to quickly identify the adapter you need.

Integrated Pull Tab: Easily grab the adapters when you need them with the integrated Pull Tab that is also available to be customized to feature your company or organization logo. Minimum order quantities apply to customized Pull Tabs.

Universal Cable Mount: The universal cable mount attaches directly to the in-room HDMI display cable, ensuring that the adapters are always within reach. The adapter ring slides to the HDMI connector when needed and out of the way when not in use, reducing strain on the HDMI cable and clutter on the tabletop. The optional stopper fits on HDMI cables from 5mm to 10mm in diameter and prevents the adapters from sliding too far down the cable.

Tools Included: To simplify the process, installation tools for mounting the adapters and optional stopper are included. The innovative HDMI Cable Gauge Tool reduces stopper installation time by allowing the right-sized stopper insert for the HDMI cable to be quickly identified.

FEATURES

- Adapters support up to a 4K video resolution, so meeting attendees will be able to see the displayed content for improved comprehension and detailed decision making.
- Adapters are color coded, so no more frustration trying to find the adapter that you typically use for your laptop.
- Integrated pull tab, so the adapters can be accessed quickly or easily reached when they are tucked away.
- Installation tools are included, so you save time and money by not needing to purchase any additional tools.

ITEM DESCRIPTION

29878 Universal 4K HDMI Adapter Ring with Color Coded Mini DisplayPort, DisplayPort, and USB-C

DATA SHEET

SPECIFICATIONS:

Universal 4K HDMI Adapter Ring with Color Coded Mini DisplayPort, DisplayPort, and USB-C

SIGNAL SPECIFICATIONS:

- USB Type-C to HDMI Adapter: 100% Functional Test at 4K/60Hz/4:4:4 Resolution with Standard AV Test Equipment
- DisplayPort to HDMI Adapter: 100% Functional Test at 4K/30Hz Resolution with Standard AV Test Equipment
- Mini DisplayPort to HDMI Adapter: 100% Functional Test at 4K/30Hz Resolution with Standard AV Test Equipment

ELECTRICAL SPECIFICATIONS:

- USB Type-C to HDMI Adapter Power Consumption: 1050mW (210mA/5.0V)
- DisplayPort to HDMI Adapter Power Consumption: 396mW (120mA/3.3V)
- Mini DisplayPort to HDMI Adapter Power Consumption: 396mW (120mA/3.3V)

PHYSICAL SPECIFICATIONS:

- Operating Temperature: 0°C - 40°C (0% - 90%RH)
- Storage Temperature: -10°C - 60°C (0% - 90%RH)











PHYSICAL CHARACTERISTICS:

- HDMI 19pin Female Connector: Solder Type, Contacts: Brass, Gold Flash, Housing: LCP, Black, Shell: Nickel Plated
- USB Type-C Male Connector: Solder Type, Contacts: Brass, Gold Flash, Housing: LCP, Black, Shell: Nickel Plated
- DisplayPort Male Connector: Solder Type, Contacts: Brass, Gold Flash, Housing: LCP Black, Shell: Nickel Plated
- Mini DisplayPort Male Connector: Solder Type, Contacts: Brass, Gold Flash, Housing: LCP Black, Shell: Nickel Plated
- Adapter Hood: Molded Black (Pantone/#Black 6C) PVC
- USB Type-C to HDMI Adapter Color Band: Green (Pantone#354C) 12 x 1.5mm
- DisplayPort to HDMI Adapter Color Band: Red (Pantone#032C) 12 x 1.5mm
- Mini DisplayPort to HDMI Adapter Color Band: Yellow (Pantone#012C) 12 x 1.5mm
- Black Metal Screws (x2): 4.8 x 17.1mm, M3, Material: Steel
- Locking Coupler (x2): $\varnothing 6.0$ x 5mm, M3, Material: Brass, Color: Black
- Nut (x2): $\varnothing 4.5$ x 3.8mm, M3, Material: Brass, Color: Black
- Pull Tab: 80 x 25 x 2mm, Material: Polyester, Black Background, White Text, with Black Eyelet
- Hex Nut Tool: Material: Steel, 17 x 47 x 1.5mm
- Steel Wire: OD 1.2mm, Color: Black
- Cable Stopper: 58 x 98mm, Molded Black (Pantone/#Black 6C) 30P PVC
- Product is CE marked and conforms to 2011/65/EU ROHS 2

DATA SHEET

SPECIFICATIONS:

Universal 4K HDMI Adapter Ring with Color Coded Mini DisplayPort, DisplayPort, and USB-C

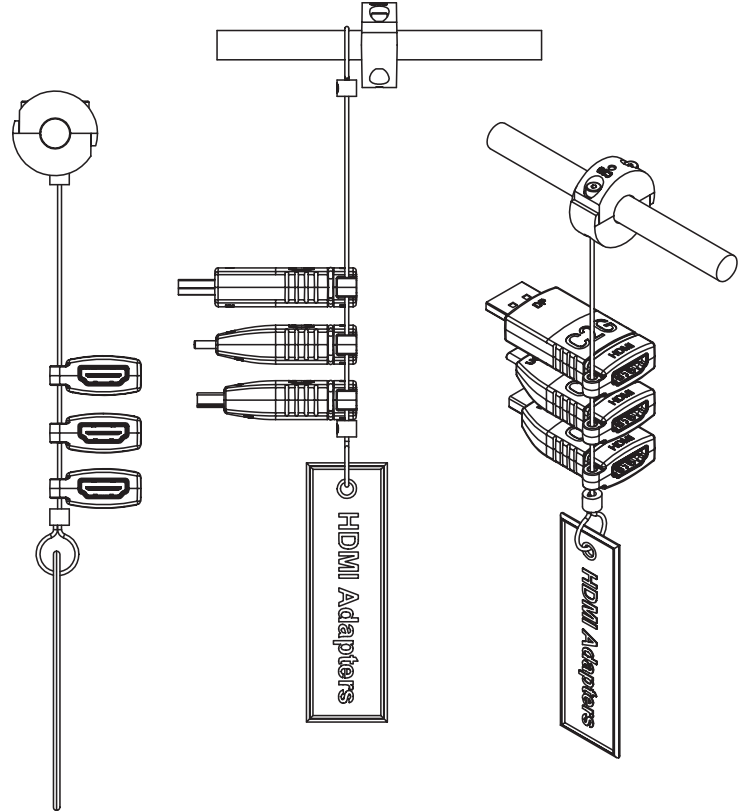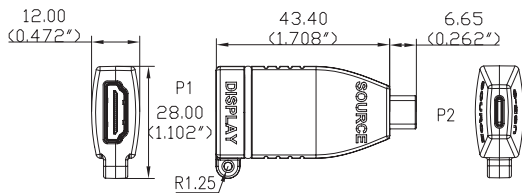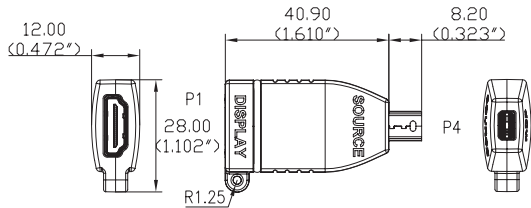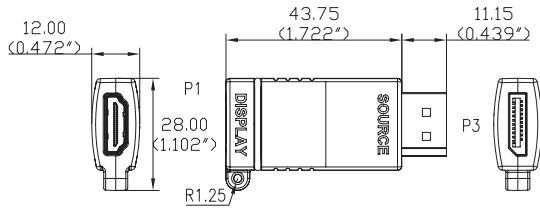

C2G
A brand of **legrand**

6500 Poe Avenue
Dayton, OH 45414
Phone: 800.CABL.911
www.c2g.com

Follow Us

