



DATA SHEET

HDBaseT Certified Cat6a Cable with Discontinuous Shielding

Ideal for use with HD A/V applications from HDBaseT extenders and Power over Ethernet (PoE) applications requiring higher levels of current.

OVERVIEW

This Snagless Discontinuous Shielded Cat6a patch cable is ideal for use with HD A/V applications from HDBaseT extenders and Power over Ethernet (PoE) applications requiring higher levels of current. The HD A/V application is perfect for conference rooms and digital signage where greater distance requirements are needed between a source and a display. Each patch cable is fully tested to meet ANSI/TIA 568 C.2 Cat6a channel requirements.

HDBaseT Certified: These cables have been tested and validated to guarantee they consistently meet the highest industry performance and safety standards.

Design Features: The uniquely designed Isolation Wrap contains discontinuous sections of metallized material, held in place by a polymeric layer. These cables have a nominal 0.265" diameter that allows for higher cable density and smaller bend radius than other Cat6a cable products. These cables are also designed for Power over Ethernet (PoE) applications type 1-4 according to IEEE 802.3bt draft D1.2.

FEATURES

- Discontinuous shielding avoids need for grounding
- HDBaseT Class A and B certified
- Designed to support up to 10 Gigabit data transmission
- Snagless design for high density applications

ITEM	DESCRIPTION
43171	35ft HDBaseT Certified Cat6a Cable with Discontinuous Shielding
43172	50ft HDBaseT Certified Cat6a Cable with Discontinuous Shielding
43173	75ft HDBaseT Certified Cat6a Cable with Discontinuous Shielding
43174	100ft HDBaseT Certified Cat6a Cable with Discontinuous Shielding
43175	150ft HDBaseT Certified Cat6a Cable with Discontinuous Shielding
43176	200ft HDBaseT Certified Cat6a Cable with Discontinuous Shielding
43177	250ft HDBaseT Certified Cat6a Cable with Discontinuous Shielding
43178	300ft HDBaseT Certified Cat6a Cable with Discontinuous Shielding

Discontinuous Shield: These cables have discontinuous metallic shielding elements surrounding the inner 4-pair core of the cable. The effect of this approach is to attenuate both electromagnetic signals that emanate from the cable core and the potentially interfering electromagnetic signals that are generated by other sources. The metallic shielding elements are designed to be discontinuous to avoid any need for grounding, which is a requirement for shielded cable designs, and have been shown to provide superior Alien Crosstalk performance in comparison to conventionally designed Category 6A UTP cables.

PHYSICAL SPECIFICATIONS




- Cable type: **Solid Non-Continuous FTP**
- Wiring scheme: **568B**
- Temperature rating: **75°C**
- Separator Cross-web
- Isolation Wrap: **Proprietary construction**
- Jacket: CMP: **FR, low smoke PVC**
- Conductor type: 23AWG (0.57mm) (solid annealed copper)
- Characteristic Impedance: 100
- Testing: ANSI/TIA 568 C.2 Cat6a channel tested
- Sustainability: UL Certified EPD, HPD, Multi-Attribute Certification, USGBC® Member, RoHS-compliant/RoHS 2-compliant, REACH-compliant
- Performance Compliance: UL 444, CSA C22.2 No. 214-08, UL 1666, NFPA 262, ANSI/TIA-568-C.2, Article 800, NEC (NFPA 70), HDBaseT Class A and B
- NRTL Programs: UL Verified CAT 6A, UL, c(UL) Listed CMR, UL, c(UL) Listed CMP, HDBaseT Certified

CONNECTORS


- Connector Type: **RJ-45 Male**
- Housing: **Polycarbonate**
- Contacts: **50µm gold plated**
- Hood: **Molded Snagless PVC**
- Dimension (L x W x H): **38.2 x 11.6 x 15.1mm**

RJ45 Connector Detail (Side A)

- Flame Retardant PVC Jacket
- Thermoplastic Insulation
- Cross-web Separator
- Solid Annealed Copper Conductor
- Isolation Wrap

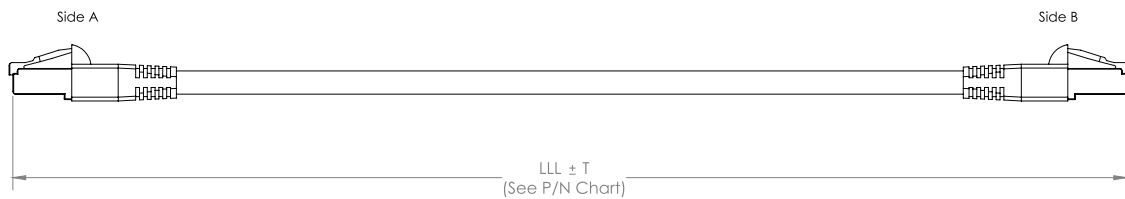

Pin-out Chart (568B)		
RJ45 (Side A)	Position	RJ45 (Side B)
White/Orange	1	White/Orange
Orange	2	Orange
White/Green	3	White/Green
Blue	4	Blue
White/Blue	5	White/Blue
Green	6	Green
White/Brown	7	White/Brown
Brown	8	Brown



LEGRAND | AV COMMERCIAL BRANDS

C2G | Chief | Da-Lite | Luxul | Middle Atlantic | Vaddio | Wiremold

SIMPLIFIED CONNECTIVITY

USA 800.506.9607 | c2g.com | legrandav.com | customer-service@c2g.com

EMEA +31 495 580 840 | c2g.com/uk | legrandav.com | c2g.emea@av.legrand.com

©2023 Legrand AV Inc. 230457 Rev B 6/23 C2G is a registered trademark of Legrand AV Inc. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.